

CHAPTER 2

GEODESY AND DATUMS IN NAVIGATION

GEODESY, THE BASIS OF CARTOGRAPHY

200. Definition

Geodesy is the science concerned with the exact positioning of points on the surface of the earth. It also involves the study of variations of the earth's gravity, the application of these variations to exact measurements on the earth, and the study of the exact size and shape of the earth. These factors were unimportant to early navigators because of the relative inaccuracy of their methods. The precise accuracies of today's navigation systems and the global nature of satellite and other long-range positioning methods demand a more complete understanding of geodesy than has ever before been required.

201. The Shape Of The Earth

The irregular **topographic surface** is that upon which actual geodetic measurements are made. The measurements, however, are reduced to the **geoid**. Marine navigation measurements are made on the ocean surface which approximates the geoid.

The **geoid** is a surface along which gravity is always

equal and to which the direction of gravity is always perpendicular. The latter is particularly significant because optical instruments containing level devices are commonly used to make geodetic measurements. When properly adjusted, the vertical axis of the instrument coincides with the direction of gravity and is, therefore, perpendicular to the geoid.

The geoid is that surface to which the oceans would conform over the entire earth if free to adjust to the combined effect of the earth's mass attraction and the centrifugal force of the earth's rotation. The ideal ocean surface would be free of ocean currents and salinity changes. Uneven distribution of the earth's mass makes the geoidal surface irregular.

The geoid refers to the actual size and shape of the earth, but such an irregular surface has serious limitations as a mathematical earth model because:

- It has no complete mathematical expression.
- Small variations in surface shape over time introduce small errors in measurement.
- The irregularity of the surface would necessitate a prohibitive amount of computations.

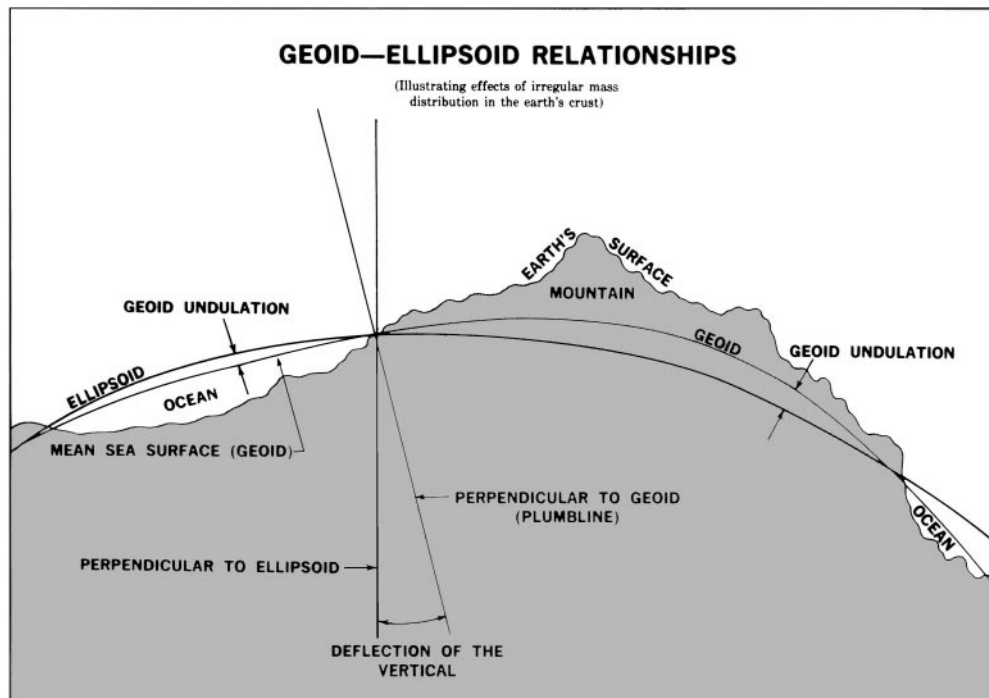


Figure 201. Geoid, ellipsoid, and topographic surface of the earth, and deflection of the vertical due to differences in mass.

The surface of the geoid, with some exceptions, tends to rise under mountains and to dip above ocean basins.

For geodetic, mapping, and charting purposes, it is necessary to use a regular or geometric shape which closely approximates the shape of the geoid either on a local or global scale and which has a specific mathematical expression. This shape is called the **ellipsoid**.

The separations of the geoid and ellipsoid are called **geoidal heights, geoidal undulations, or geoidal separations**.

The irregularities in density and depths of the material making up the upper crust of the earth also result in slight alterations of the direction of gravity. These alterations are reflected in the irregular shape of the geoid, the surface that is perpendicular to a plumb line.

Since the earth is in fact flattened slightly at the poles and bulges somewhat at the equator, the geometric figure used in geodesy to most nearly approximate the shape of the earth is the **oblate spheroid or ellipsoid of revolution**. This is the three dimensional shape obtained by rotating an ellipse about its minor axis.

202. Defining The Ellipsoid

An ellipsoid of revolution is uniquely defined by specifying two parameters. Geodesists, by convention, use the **semimajor axis** and **flattening**. The size is represented by the radius at the equator, the semimajor axis. The shape of the ellipsoid is given by the flattening, which indicates how closely an ellipsoid approaches a spherical shape. The flattening is the ratio of the difference between the semimajor and semiminor axes of the ellipsoid and the semimajor axis. See Figure 202. If a and b represent the semimajor and semiminor axes, respectively, of the ellipsoid, and f is the flattening,

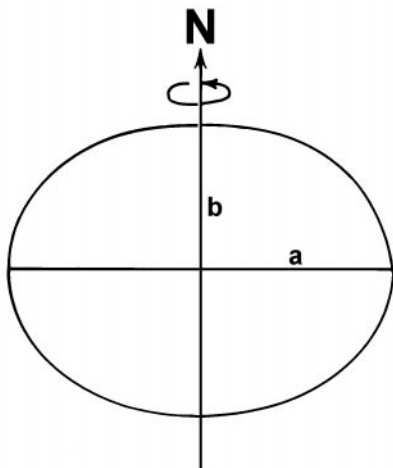


Figure 202. An ellipsoid of revolution, with semimajor axis (a), and semiminor axis (b).

$$f = \frac{a - b}{a}$$

This ratio is about 1/300 for the earth.

The ellipsoidal earth model has its minor axis parallel to the earth's polar axis.

203. Ellipsoids And The Geoid As Reference Surfaces

Since the surface of the geoid is irregular and the surface of the ellipsoid is regular, no one ellipsoid can provide other than an approximation of part of the geoidal surface. Figure 203 illustrates an example. The ellipsoid that fits well in North America does not fit well in Europe; therefore, it must be positioned differently.

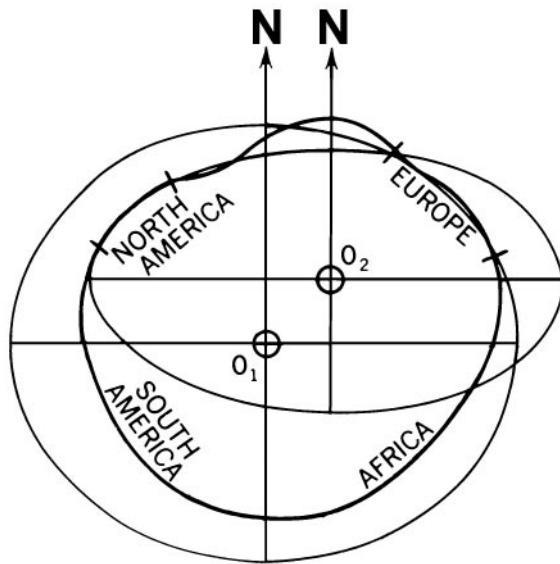


Figure 203. The geoid and two ellipsoids, illustrating how the ellipsoid which fits well in North America will not fit well in Europe, and must have a different origin. (exaggerated for clarity)

A number of reference ellipsoids are used in geodesy and mapping because an ellipsoid is mathematically simpler than the geoid.

204. Coordinates

The **astronomic latitude** is the angle between the plumb line at a station and the plane of the celestial equator. It is the latitude which results directly from observations of celestial bodies, uncorrected for deflection of the vertical component in the meridian (north-south) direction. Astronomic latitude applies only to positions on the earth. It is

reckoned from the astronomic equator (0°), north and south through 90° .

The **astronomic longitude** is the angle between the plane of the celestial meridian at a station and the plane of the celestial meridian at Greenwich. It is the longitude which results directly from observations of celestial bodies, uncorrected for deflection of the vertical component in the prime vertical (east-west) direction. These are the coordinates observed by the celestial navigator using a sextant and a very accurate clock based on the earth's rotation.

Astronomic observations by geodesists are made with optical instruments (theodolite, zenith camera, prismatic astrolabe) which all contain leveling devices. When properly adjusted, the vertical axis of the instrument coincides with the direction of gravity, and is, therefore, perpendicular to the geoid. Thus, astronomic positions are referenced to the geoid. Since the geoid is an irregular, non-mathematical surface, astronomic positions are wholly independent of each other.

The **geodetic latitude** is the angle which the normal to the ellipsoid at a station makes with the plane of the geodetic equator. In recording a geodetic position, it is essential that the geodetic datum on which it is based be also stated. A geodetic latitude differs from the corresponding astronomic latitude by the amount of the meridian component of the local deflection of the vertical.

The **geodetic longitude** is the angle between the plane of the geodetic meridian at a station and the plane of the geodetic meridian at Greenwich. A geodetic longitude dif-

fers from the corresponding astronomic longitude by the prime vertical component of the local deflection of the vertical divided by the cosine of the latitude. The geodetic coordinates are used for mapping.

The **geocentric latitude** is the angle at the center of the ellipsoid (used to represent the earth) between the plane of the equator, and a straight line (or radius vector) to a point on the surface of the ellipsoid. This differs from geodetic latitude because the earth is approximated more closely by a spheroid than a sphere and the meridians are ellipses, not perfect circles.

Both geocentric and geodetic latitudes refer to the reference ellipsoid and not the earth. Since the parallels of latitude are considered to be circles, geodetic longitude is geocentric, and a separate expression is not used.

Because of the oblate shape of the ellipsoid, the length of a degree of geodetic latitude is not everywhere the same, increasing from about 59.7 nautical miles at the equator to about 60.3 nautical miles at the poles.

A **horizontal geodetic datum** usually consists of the astronomic and geodetic latitude, and astronomic and geodetic longitude of an initial point (origin); an azimuth of a line (direction); the parameters (radius and flattening) of the ellipsoid selected for the computations; and the geoidal separation at the origin. A change in any of these quantities affects every point on the datum.

For this reason, while positions within a given datum are directly and accurately relateable, those from different datums must be transformed to a common datum for consistency.

TYPES OF GEODETIC SURVEY

205. Triangulation

The most common type of geodetic survey is known as **triangulation**. Triangulation consists of the measurement of the angles of a series of triangles. The principle of triangulation is based on plane trigonometry. If the distance along one side of the triangle and the angles at each end are accurately measured, the other two sides and the remaining angle can be computed. In practice, all of the angles of every triangle are measured to provide precise measurements. Also, the latitude and longitude of one end of the measured side along with the length and direction (azimuth) of the side provide sufficient data to compute the latitude and longitude of the other end of the side.

The measured side of the base triangle is called a **baseline**. Measurements are made as carefully and accurately as possible with specially calibrated tapes or wires of Invar, an alloy highly resistant to changes in length resulting from changes in temperature. The tape or wires are checked periodically against standard measures of length.

To establish an arc of triangulation between two widely separated locations, the baseline may be measured and longitude and latitude determined for the initial points at

each location. The lines are then connected by a series of adjoining triangles forming quadrilaterals extending from each end. All angles of the triangles are measured repeatedly to reduce errors. With the longitude, latitude, and azimuth of the initial points, similar data is computed for each vertex of the triangles, thereby establishing triangulation stations, or geodetic control stations. The coordinates of each of the stations are defined as geodetic coordinates.

Triangulation is extended over large areas by connecting and extending series of arcs to form a network or triangulation system. The network is adjusted in a manner which reduces the effect of observational errors to a minimum. A denser distribution of geodetic control is achieved in a system by subdividing or filling in with other surveys.

There are four general classes or orders of triangulation. **First-order** (primary) triangulation is the most precise and exact type. The most accurate instruments and rigorous computation methods are used. It is costly and time-consuming, and is usually used to provide the basic framework of control data for an area, and the determination of the figure of the earth. The most accurate first-order surveys furnish control points which can be interrelated with an accuracy ranging from 1 part in 25,000 over short distances to

approximately 1 part in 100,000 for long distances.

Second-order triangulation furnishes points closer together than in the primary network. While second-order surveys may cover quite extensive areas, they are usually tied to a primary system where possible. The procedures are less exacting and the proportional error is 1 part in 10,000.

Third-order triangulation is run between points in a secondary survey. It is used to densify local control nets and position the topographic and hydrographic detail of the area. Triangle error can amount to 1 part in 5,000.

The sole accuracy requirement for **fourth-order** triangulation is that the positions be located without any appreciable error on maps compiled on the basis of the control. Fourth-order control is done primarily as mapping control.

206. Trilateration, Traverse, And Vertical Surveying

Trilateration involves measuring the sides of a chain of triangles or other polygons. From them, the distance and direction from A to B can be computed. Figure 206 shows this process.

Traverse involves measuring distances and the angles between them without triangles for the purpose of computing the distance and direction from A to B. See Figure 206.

Vertical surveying is the process of determining elevations above mean sea-level. In geodetic surveys executed primarily for mapping, geodetic positions are referred to an ellipsoid, and the elevations of the positions are referred to the geoid. However, for satellite geodesy the geoidal heights must be considered to establish the correct height above the geoid.

Precise geodetic **leveling** is used to establish a basic

network of vertical control points. From these, the height of other positions in the survey can be determined by supplementary methods. The mean sea-level surface used as a reference (vertical datum) is determined by averaging the hourly water heights for a specified period of time at specified tide gauges.

There are three leveling techniques: **differential**, **trigonometric**, and **barometric**. Differential leveling is the most accurate of the three methods. With the instrument locked in position, readings are made on two calibrated staffs held in an upright position ahead of and behind the instrument. The difference between readings is the difference in elevation between the points.

Trigonometric leveling involves measuring a vertical angle from a known distance with a theodolite and computing the elevation of the point. With this method, vertical measurement can be made at the same time horizontal angles are measured for triangulation. It is, therefore, a somewhat more economical method but less accurate than differential leveling. It is often the only practical method of establishing accurate elevation control in mountainous areas.

In barometric leveling, differences in height are determined by measuring the differences in atmospheric pressure at various elevations. Air pressure is measured by mercurial or aneroid barometer, or a boiling point thermometer. Although the accuracy of this method is not as great as either of the other two, it obtains relative heights very rapidly at points which are fairly far apart. It is used in reconnaissance and exploratory surveys where more accurate measurements will be made later or where a high degree of accuracy is not required.

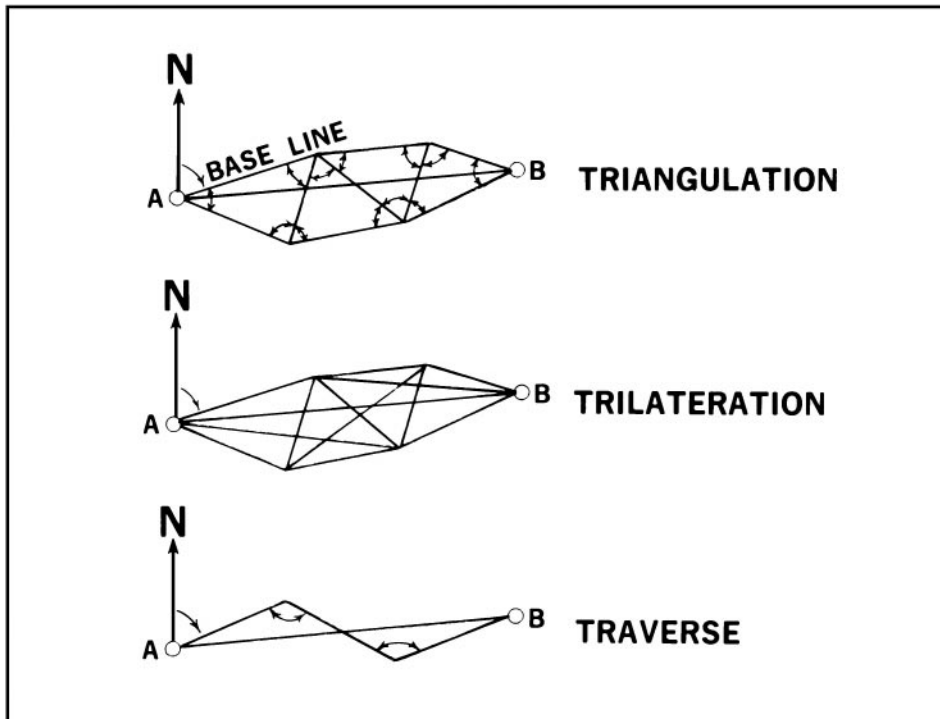


Figure 206. Triangulation, trilateration, and traverse.

DATUM CONNECTIONS

207. Definitions

A **datum** is defined as any numerical or geometrical quantity or set of such quantities which serves as a reference point to measure other quantities.

In geodesy, as well as in cartography and navigation, two types of datums must be considered: a **horizontal datum** and a **vertical datum**. The horizontal datum forms the basis for computations of horizontal position. The vertical datum provides the reference to measure heights. A horizontal datum may be defined at an origin point on the ellipsoid (local datum) such that the center of the ellipsoid coincides with the Earth's center of mass (geocentric datum). The coordinates for points in specific geodetic surveys and triangulation networks are computed from certain initial quantities, or datums.

208. Preferred Datums

In areas of overlapping geodetic triangulation networks, each computed on a different datum, the coordinates

of the points given with respect to one datum will differ from those given with respect to the other. The differences can be used to derive transformation formulas. Datums are connected by developing transformation formulas at common points, either between overlapping control networks or by satellite connections.

Many countries have developed national datums which differ from those of their neighbors. Accordingly, national maps and charts often do not agree along national borders.

The **North American Datum, 1927 (NAD 27)** has been used in the United States for about 50 years, but it is being replaced by datums based on the **World Geodetic System**. NAD 27 coordinates are based on the latitude and longitude of a triangulation station (the reference point) at Mead's Ranch in Kansas, the azimuth to a nearby triangulation station called Waldo, and the mathematical parameters of the Clarke Ellipsoid of 1866. Other datums throughout the world use different assumptions as to origin points and ellipsoids.

The origin of the **European Datum** is at Potsdam,

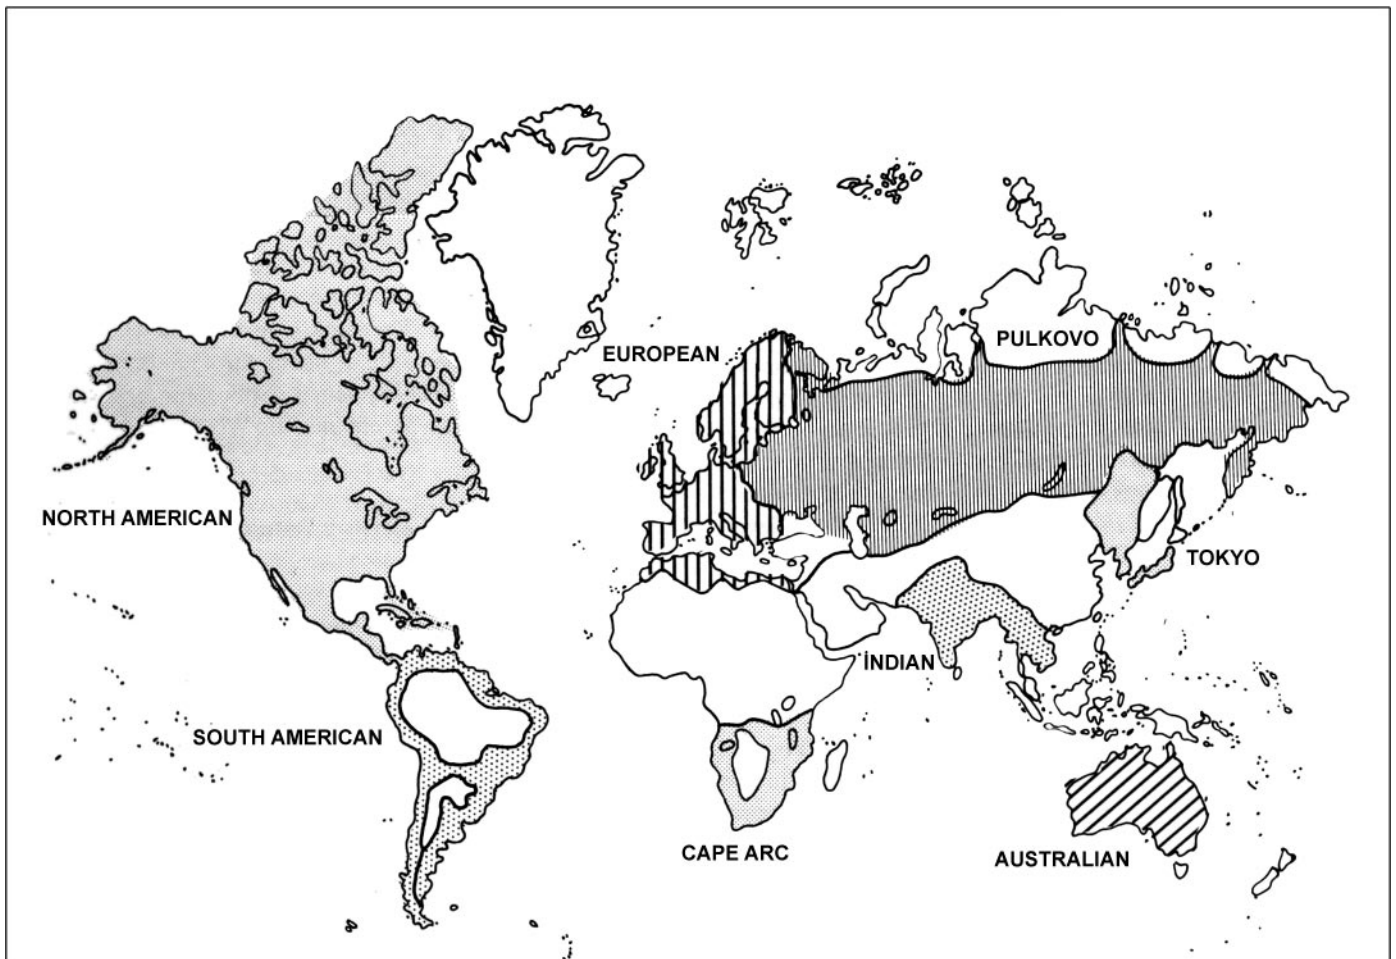


Figure 208. Major geodetic datum blocks.

Germany. Numerous national systems have been joined into a large datum based upon the International Ellipsoid of 1924 which was oriented by a modified astrogeodetic method. European, African, and Asian triangulation chains were connected, and African measurements from Cairo to Cape Town were completed. Thus, all of Europe, Africa, and Asia are molded into one great system. Through common survey stations, it was also possible to convert data from the Russian Pulkova, 1932 system to the European Datum, and as a result, the European Datum includes triangulation as far east as the 84th meridian. Additional ties across the Middle East have permitted connection of the Indian and European Datums.

The **Ordnance Survey of Great Britain 1936 Datum** has no point of origin. The data was derived as a best fit between retriangulation and original values of 11 points of the

earlier Principal Triangulation of Great Britain (1783-1853).

Tokyo Datum has its origin in Tokyo. It is defined in terms of the Bessel Ellipsoid and oriented by a single astronomical station. Triangulation ties through Korea connect the Japanese datum with the Manchurian datum. Unfortunately, Tokyo is situated on a steep slope on the geoid, and the single-station orientation has resulted in large systematic geoidal separations as the system is extended from its initial point.

The **Indian Datum** is the preferred datum for India and several adjacent countries in Southeast Asia. It is computed on the Everest Ellipsoid with its origin at Kalianpur, in central India. It is largely the result of the untiring work of Sir George Everest (1790-1866), Surveyor General in India from 1830 to 1843. He is best known by the mountain named after him, but by far his most important legacy was the survey of the Indian subcontinent.

MODERN GEODETIC SYSTEMS

209. Development Of The World Geodetic System

By the late 1950's the increasing range and sophistication of weapons systems had rendered local or national datums inadequate for military purposes; these new weapons required datums at least continental in scope. In response to these requirements, the U.S. Department of Defense generated a geocentric reference system to which different geodetic networks could be referred and established compatibility between the coordinates of sites of interest. Efforts of the Army, Navy, and Air Force were combined leading to the development of the DoD **World Geodetic System of 1960 (WGS 60)**.

In January 1966, a World Geodetic System Committee was charged with the responsibility for developing an improved WGS needed to satisfy mapping, charting, and geodetic requirements. Additional surface gravity observations, results from the extension of triangulation and trilateration networks, and large amounts of Doppler and optical satellite data had become available since the development of WGS 60. Using the additional data and improved techniques, the Committee produced **WGS 66** which served DoD needs following its implementation in 1967.

The same World Geodetic System Committee began work in 1970 to develop a replacement for WGS 66. Since the development of WGS 66, large quantities of additional data had become available from both Doppler and optical satellites, surface gravity surveys, triangulation and trilateration surveys, high precision traverses, and astronomical surveys.

In addition, improved capabilities had been developed in both computers and computer software. Continued research in computational procedures and error analyses had produced better methods and an improved facility for handling and combining data. After an extensive effort extending over a period of approximately three years, the Committee completed the development of the Department

of Defense **World Geodetic System 1972 (WGS 72)**.

Further refinement of WGS 72 resulted in the new **World Geodetic System of 1984 (WGS 84)**. As of 1990, WGS 84 is being used for chart making by DMA. For surface navigation, WGS 60, 66, 72 and the new WGS 84 are essentially the same, so that positions computed on any WGS coordinates can be plotted directly on the others without correction.

The WGS system is not based on a single point, but many points, fixed with extreme precision by satellite fixes and statistical methods. The result is an ellipsoid which fits the real surface of the earth, or geoid, far more accurately than any other. The WGS system is applicable worldwide. All regional datums can be referenced to WGS once a survey tie has been made.

210. The New North American Datum Of 1983

The Coast And Geodetic Survey of the National Ocean Service (NOS), NOAA, is responsible for charting United States waters. From 1927 to 1987, U.S. charts were based on NAD 27, using the Clarke 1866 ellipsoid. In 1989, the U.S. officially switched to **NAD 83** (navigationally equivalent to WGS 84 and other WGS systems) for all mapping and charting purposes, and all new NOS chart production is based on this new standard.

The grid of interconnected surveys which criss-crosses the United States consists of some 250,000 control points, each consisting of the latitude and longitude of the point, plus additional data such as elevation. Converting the NAD 27 coordinates to NAD 83 involved recomputing the position of each point based on the new NAD 83 datum. In addition to the 250,000 U.S. control points, several thousand more were added to tie in surveys from Canada, Mexico, and Central America.

Conversion of new edition charts to the new datums, either WGS 84 or NAD 83, involves converting reference

points on each chart from the old datum to the new, and adjusting the latitude and longitude grid (known as the graticule) so that it reflects the newly plotted positions. This

adjustment of the graticule is the only difference between charts which differ only in datum. All charted features remain in exactly the same relative positions.

IMPACTS ON NAVIGATION

211. Datum Shifts

One impact of different datums on navigation appears when a navigation system provides a fix based on a datum different from that used for the nautical chart. The resulting plotted position may be different from the actual location on that chart. This difference is known as a **datum shift**.

Another effect on navigation occurs when shifting between charts that have been made using different datums. If any position is replotted on a chart of another datum using only latitude and longitude for locating that position, the newly plotted position will not match with respect to other charted features. This datum shift may be avoided by replotting using bearings and ranges to common points. If datum shift conversion notes for the applicable datums are given on the charts, positions defined by latitude and longitude may be replotted after applying the noted correction.

The positions given for chart corrections in the Notice to Mariners reflect the proper datum for each specific chart and edition number. Due to conversion of charts based on old datums to more modern ones, and the use of many different datums throughout the world, chart corrections intended for one edition of a chart may not be safely plotted on any other.

These datum shifts are not constant throughout a given area, but vary according to how the differing datums fit together. For example, the NAD 27 to NAD 83 conversion results in changes in latitude of 40 meters in Miami, 11 meters in New York, and 20 meters in Seattle. Longitude changes for this conversion are about 22 meters in Miami, 35 meters in New York, and 93 meters in Seattle.

Most charts produced by DMA and NOS show a "datum note." This note is usually found in the title block or in the upper left margin of the chart. According to the year of the chart edition, the scale, and policy at the time of production, the note may say "World Geodetic System 1972 (WGS-72)", "World Geodetic System 1984 (WGS-84)", or "World Geodetic System (WGS)." A datum note for a chart for which satellite positions can be plotted without correction will read: "Positions obtained from satellite navigation systems referred to (REFERENCE DATUM) can be plotted directly on this chart."

DMA reproductions of foreign chart's will usually be in the datum or reference system of the producing country. In these cases a conversion factor is given in the following format: "Positions obtained from satellite navigation systems referred to the (Reference Datum) must be moved X.XX minutes (Northward/Southward) and X.XX minutes (Eastward/ Westward) to agree with this chart."

Some charts cannot be tied in to WGS because of lack

of recent surveys. Currently issued charts of some areas are based on surveys or use data obtained in the age of sailing ships. The lack of surveyed control points means that they cannot be properly referenced to modern geodetic systems. In this case there may be a note that says: "Adjustments to WGS cannot be determined for this chart."

A few charts may have no datum note at all, but may carry a note which says: "From various sources to (year)." In these cases there is no way for the navigator to determine the mathematical difference between the local datum and WGS positions. However, if a radar or visual fix can be very accurately determined, the difference between this fix and a satellite fix can determine an approximate correction factor which will be reasonably consistent for that local area.

212. Minimizing Errors Caused By Differing Datums

To minimize problems caused by differing datums:

- Plot chart corrections only on the specific charts and editions for which they are intended. Each chart correction is specific to only one edition of a chart. When the same correction is made on two charts based on different datums, the positions for the same feature may differ slightly. This difference is equal to the datum shift between the two datums for that area.
- Try to determine the source and datum of positions of temporary features, such as drill rigs. In general they are given in the datum used in the area in question. Since these are usually positioned using satellites, WGS is the normal datum. A datum correction, if needed, might be found on a chart of the area.
- Remember that if the datum of a plotted feature is not known, position inaccuracies may result. It is wise to allow a margin of error if there is any doubt about the datum.
- Know how the datum of the positioning system you are using (Loran, GPS, etc.) relates to your chart. GPS and other modern positioning systems use the WGS datum. If your chart is on any other datum, you must apply a datum correction when plotting the GPS position of the chart.

Modern geodesy can support the goal of producing all the world's charts on the same datum. Coupling an electronic chart with satellite positioning will eliminate the problem of differing datums because electronically derived positions and the video charts on which they are displayed are derived from one of the new worldwide datums.

